


IP54 – EI Transformers for pcb mounting – 8VA > 100VA

EI PCB transformers.
 Two chamber technique VDE0570.
 EN61558 , IEC742 , CE
 Primary :230V 50-60 Hz.
 Pin grid 5mm.

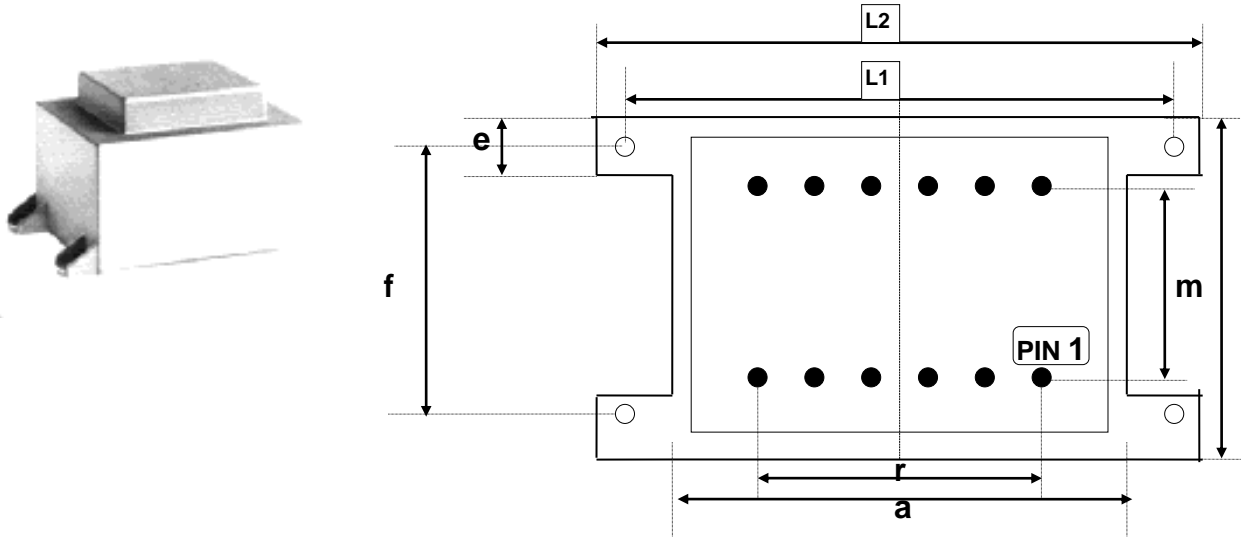

TYPE	VA	η	*	**	a	b	h1	h2	L1	L2	e	f	d	s pins	y	x	m	r
		%		Option	± 0.3	± 0.3	± 0.5	± 0.5	± 0.3	± 0.5	± 0.5		± 0.5	L x \emptyset			+0.8	± 0.1
EI 48/16.8/4	8-10	75	O	I, F K	51 51.8	43 43.4	30.1 31.3	34.6 38.2	- 60.0	- 69.2	- 10	- -	- 4.2	6 x 0.8	34	33	27.5	5x5
EI 48/20.5/4	10	78	O	I, F K	51 51.8	43 43.4	32.3 33.5	38.5 40.4	- 60.0	- 69.2	- 10	- -	- 4.2	6 x 0.8	34	33	27.5	5x5
EI 54/18.8/4	15	73	O	I, F KK	57.2 57.2	48.6 48.6	33 33	41.7 41.7	- 65	- 75.2	- 10	- 37.5	- 4.2	6 x 0.8	38.6	34	30	6x5
EI 54/23/2	20	79	O	I, F KK	57.2 57.2	48.6 48.6	37.2 37.2	45.9 45.9	- 65	- 75.2	- 10	- 37.5	- 4.2	6 x 0.8	38.6	34	30	6x5
EI 60/21	20	82	KK	I, F	63.5	53.5	35.5	44.7	72.5	81.5	10	43.5	4.2	5 x 0.8	44.0	33.5	33	6x5
EI 60/30.5	25	82	O	I, F	63.5	53.5	45.0	54.2	72.5	81.2	10	43.5	4.2	5 x 0.8	44.0	33.5	33	6x5
EI 66/23	30	83	KK	I, F	71.3 69	61.6 58.4	39.7 39.5	48.5 48.5	77.5 -	87.2 -	10 -	47.5 -	4.5 -	5 x 0.8	47	41.1	35	7x5
EI 66/30	40	84	KK		71.3	61.6	47	55.8	72.5	87.2	10	47.5	4.2	5 X 0.8	46.8	41.6	36	7x5
EI 66/34.8	50	84	KK	I, F	71.3 9	61.6 58	51.3 51.3	60.2 60.2	77.5 -	87.2 -	10 -	47.5 -	4.5 -	5 x 0.8	47	41.1	35	7x5
EI 78/27.5	60	87	KK	I	81.7 81.7	70.5 68.5	49.2 49.2	58.8 58.8	90 -	99.6 -	10.5 -	57.5 -	4.2 -	6x1x0.4 6 x 0.8	53	46.2	42.5	8x5
EI 78/36.5	80	89	KK		81.7	70.5	58.0	68.0	90.0	99.6	10.5	57.5	4.2	6x1x0.4	53	46.2	42.5	8x5
EI 84/29.5	80	89	KK		87.8	73.6	52	63	97.5	107. 5	10.5	60.0	4.2	6x1x0.4	60	51	45	9x5
EI 84/43.5	100	90	KK		87.8 87.8	73.6 73.5	65.5 68.3	76.5 76.5	97.5 -	107. 5	10.5 -	60.0 -	4.2 -	6x1x0.4 6 x 0.8	60	51	45	9x5

* : standard version

** : optional mechanical lay out.

type	
"O"	mounting by means of pins only
"F"	pins with fixing plate
"I"	mounting screws within the footprint
"K"	one mounting post on short side